

Fitting instructions for rear diffuser

Toyota GR Yaris




Material supplied

- 3-piece rear diffuser
- Adhesive Betalink
- 1x primer stick (bend before use)
- Parts certificate
- Type plate
- 7 self-tapping screws 3.9x16 mm
- 7 sheet metal nuts 3.9 mm

+++ Important notes +++

- Check attachment parts for fit before installation
- The type plate must be attached to the center of the part from below
- The assembly adhesive must cure for twelve hours before the vehicle is driven
- The car wash may only be carried out after three days
- Ideally, assembly should be carried out by two people
- In addition to the materials supplied, fixing tape (e.g. Tesa) is required

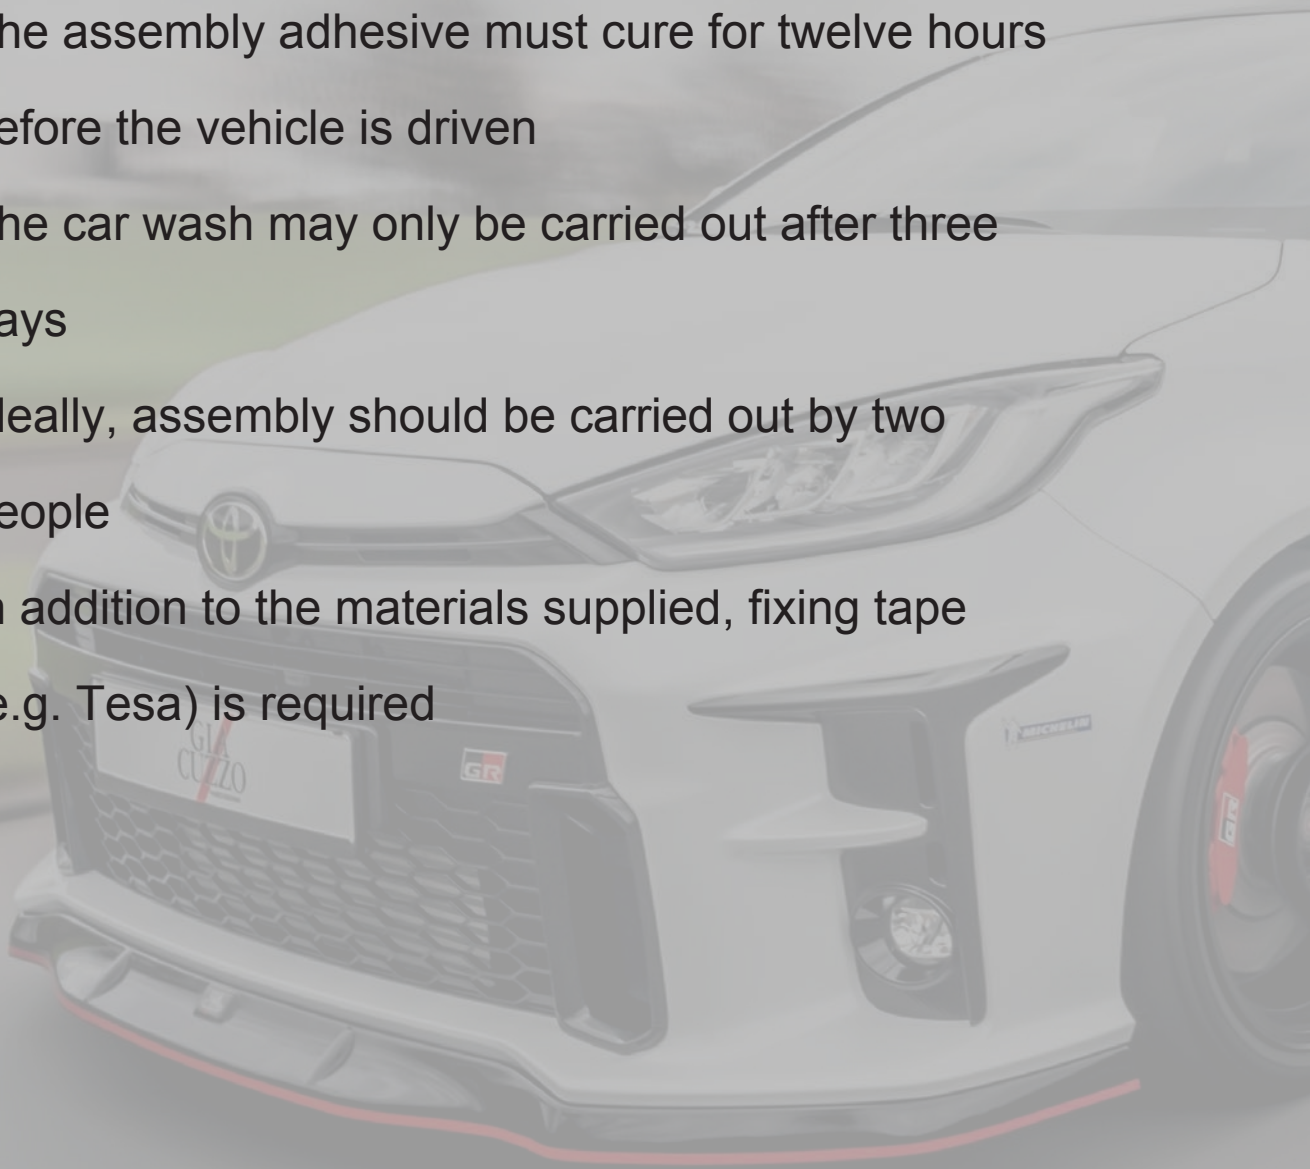

Assembly


1. Remove the protective film before fitting the diffuser
2. Check diffuser for fit to rule out tolerances on the vehicle



3. Release the clips marked in the illustration
4. Clean the adhesive surface of the rear apron and the rear diffuser corners
5. Treat the adhesive surfaces of the rear skirt and the corners with the primer sticks supplied
6. Apply the adhesive to the pre-treated surface and fit the parts to the vehicle



5. screw the center section of the rear diffuser to the rear apron using the screws supplied

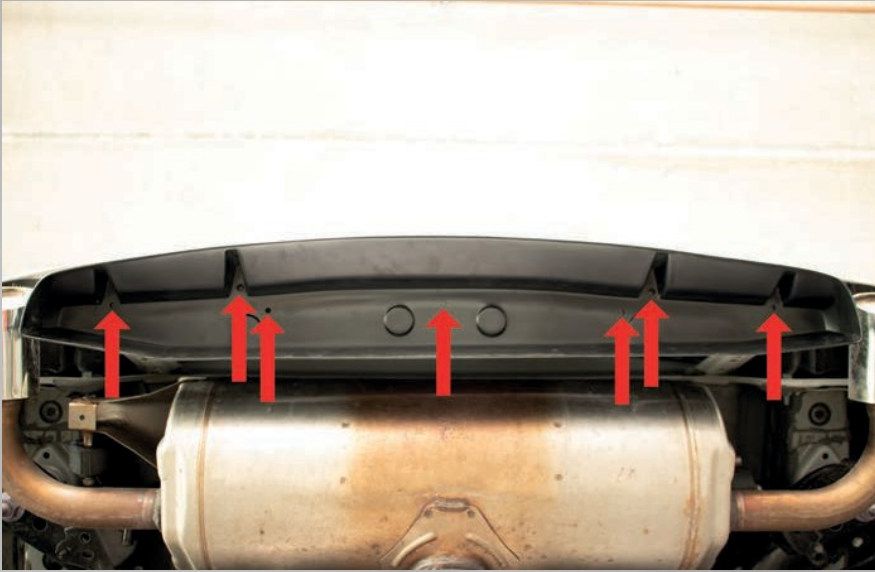



Giacuzzo GmbH
Vehicle Design
Holzener Dorfstrasse 3
58708 Menden

Phone: (0 23 73) 17 90 6 - 10

Fax: (0 23 73) 17 90 6 - 57

